

RT8K-M

144 Cells

Mono Half-Cell 9BB

435-460 W

Power output

21.16%

The Highest Efficiency

0~+5W

Tolerance

WWW.RESTARSOLAR.COM

RT8K-M HALF-CELL series is produced with high efficiency multi-busbar cells, which can reduce the module internal power loss to improve its conversion efficiency, as well as lower the failure risk caused by cracks and broken busbar to enhance the module reliability. Combined with half-cell technology, the module is highly resistant to hot-spot crisis caused by shadow effect.



HIGHER ENERGY GENERATION AND LOWER POWER LOSS



ANTI HOT SPOT&PID FREE




LESS SHADING EFFECT




APPLICABLE FOR 1500V SYSTEM, LOWER SYSTEM COST



Entire module certified to withstand high wind loads(2400Pascal) and snow loads (5400 Pascal)*

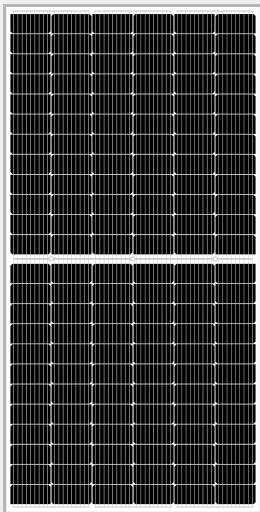

0.5% Annual Degradation over 30 years

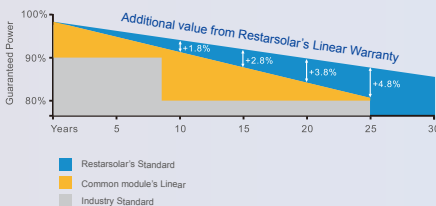


LINEAR PERFORMANCE WARRANTY
12 year Product Warranty / 30 year Linear Power Warranty

Full range of products and certification systems

ISO 9001 TUV PID-FREE CE IEC61215/61730/61701/62716



Dimension of PV Modules Unit: mm

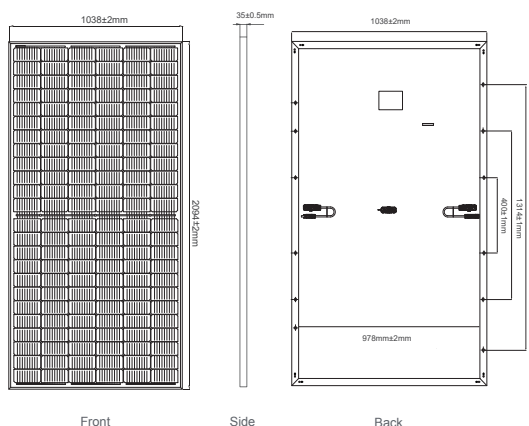

ELECTRICAL DATA(STC)

Rated Power in Watts-Pmax(Wp)	435W	440W	445W	450W	455W	460W
Open Circuit Voltage-Voc(V)	48.7V	48.9V	49.1V	49.3V	49.5V	49.7V
Short Circuit Current-Isc(A)	11.39A	11.46A	11.53A	11.6A	11.67A	11.74A
Maximum Power Voltage-Vmp(V)	40.9V	41.1V	41.3V	41.5V	41.7V	41.9V
Maximum Power Current-Imp(A)	10.64A	10.71A	10.78A	10.85A	10.91A	10.98A
Module Efficiency (%)	20.01%	20.24%	20.47%	20.70%	20.93%	21.16%


STC: Irradiance 1000 W/m², Cell Temperature 25°C, Air Mass AM1.5 according to EN 60904-3.

ELECTRICAL DATA(NOCT)


Maximum Power-Pmax (Wp)	324.9W	328.6W	332.3W	336.1W	339.8W	343.6W
Open Circuit Voltage-Voc (V)	45.7V	45.8V	46.0V	46.2V	46.4V	46.6V
Short Circuit Current-Isc (A)	9.21A	9.27A	9.33A	9.38A	9.43A	9.48A
Maximum Power Voltage-Vmp(V)	38.1V	38.3V	38.5V	38.6V	38.9V	39.1V
Maximum Power Current-Imp(A)	8.53A	8.59A	8.64A	8.7A	8.74A	8.79A

NOCT: Irradiance at 800 W/m², Ambient Temperature 20°C, Wind Speed 1 m/s.

Current-Voltage Curve (RT71-440M)

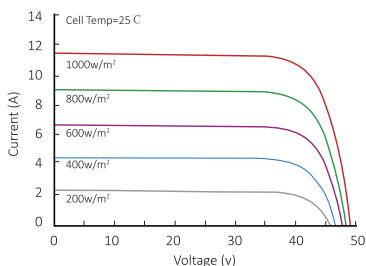

Power-Voltage Curve (RT71-440M)

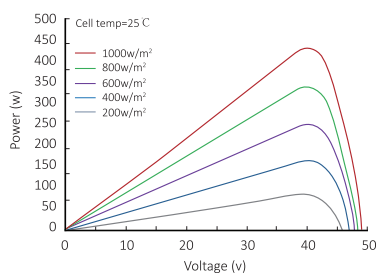


MECHANICAL DATA

Solar cells	Mono Half-Cell 166x83mm, 9 Bus bars
Cell configuration	144 Cells (6x24)
Module dimensions	2094x1038*35mm
Weight	25KGS
Front Cover	3.2mm Tempered Glass
Frame Material	Anodized Aluminum Alloy
J-BOX	IP68, 3 Diodes
Cable	4mm2(IEC)/12AWG(UL), 300mm or customized
Connectors	MC4 or MC4 Comparable
Standard Packaging	31pcs/pallet

TEMPERATURE & MAXIMUM RATINGS

Nominal Operating Cell Temperature (NOCT)	45°C±2°C
Temperature Coefficient of Voc	-0.32%/°C
Temperature Coefficient of Isc	0.05%/°C
Temperature Coefficient of Pmax	-0.39%/°C
Operational Temperature	-40~+85°C
Maximum System Voltage	1500V(IEC)
Max Series Fuse Rating	20A

Partner information



PACKAGING CONFIGURATION

Modules per container	40HQ
Package	726pcs
Package Number	31pcs/pallet, 2pcs/carton
	22pallets + 22cartons